

PS9-HH ABC

Stored pressure

Powder

9 kg

Temperature ranges

-30° + 60°



43



233



✓

BODY

STEEL

Deep drawn 2-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin.

VALVE

ALUMINUM

Squeeze grip lever operated valve with aluminum body. The shock-proof pressure gauge provides an accurate indication of the pressure status of the extinguisher.

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615.

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection.


HOSE/HORN

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle.

PACKAGING


Single piece cardboard box, robust and suitable for transport.



Configuration	☒ Standard	☐ On request	
BRACKET	 ☐ Button holed wall bracket	 ☐ TRANSPORT BRACKET PS9-H	 ☐ Button holed wall bracket
PACKAGING	 ☐ BOX PS9 J/HJ		
HOSE RINGS & PROTECTIVE BASE	 ☐ Protective base 9KG Ø190 black	 ☒ Hose holder D190 black	

Technical data

FIRE RATINGS	43A 233B C	
CHARGE	9 kg ±2%	
MATERIAL	STEEL	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	ABC POWDER A32	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 21 s
PRESSURE	Operating pressure at 60 °C	15 bar
	Operating pressure at 20 °C	13 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	545 mm
	Bottle outer diameter	190 mm
WEIGHT	Empty / Charged	3.84 kg / 12.84 kg
PACKING SPECIFICATIONS	Standard packing	1 Pieces cardboard box
	Carton size (B x L x H)	200 x 200 x 600 mm
	Weight per carton	13.4 kg
	Pallet	48 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1500 mm
	Pallet volume	1.44 m3
	Weight per pallet (net/gross)	645 kg / 663 kg

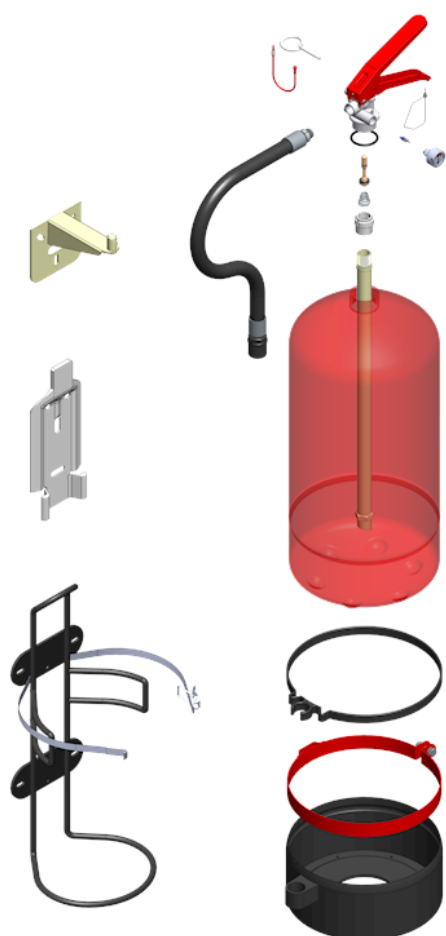

Spare parts list

Description	Code
SAFETY WIRE	00.005A.3220.00K0
BUTTON HOLED WALL BRACKET	00.005E.2900.00K0
WALL BRACKET	00.005E.2950.00K0
O-RING VALVE 29.74 x 2.95	00.033E.1100.01K0
SPINDLE	00.241E.6100.00K0
TRANSPORT BRACKET	00.241F.2900.00K0
PRESSURE GAUGE	00.245E.4951.10K0
BASE Ø190	00.265F.2100.00K0
WALL BRACKET	00.752B.2900.10K0
SUPPORT DE LANCE	00.850E.2960.01K0
SAFETY PIN	00.886E.5020.00K0
SCHRADER VALVE	00.886E.5100.00K0
TAPERED SPRING	00.886E.5200.00K0
DIP TUBE HOLDER	00.886E.5810.00K0
VALVE ASSEMBLY	00.886E.8100.01K0
HOSE HOLDER Ø190	00.895F.2800.00K0
METALLIC SUPPORT Ø190	00.895F.2970.00K0