

# PS3-HX ABC

Stored pressure

Powder

3 kg

# ANAFGROUP

Temperature ranges

-30° + 60°



On Request

BODY

STEEL

Deep drawn 2-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin.

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts.

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615.

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection.

PACKAGING

4 pieces cardboard box, robust and suitable for transport.



Configuration

● Standard

○ On request

PACKAGING



○ 4 pieces Cardboard box PS3-XC


BRACKET



● BRACKET PS3-XC

## Technical data

FIRE RATINGS	13A 89B C	
CHARGE	3 kg ±2%	
MATERIAL	STEEL	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	POWDER ABC A33	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 13 s
PRESSURE	Operating pressure at 60 °C	15 bar
	Operating pressure at 20 °C	13 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	385 mm
	Bottle outer diameter	130 mm
WEIGHT	Empty / Charged	1.43 kg / 4.43 kg
PACKING SPECIFICATIONS	Standard packing	4 Pieces cardboard box
	Carton size (B x L x H)	275 x 275 x 397 mm
	Weight per carton	18.1 kg
	Pallet	36 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1341 mm
	Pallet volume	1.29 m3
	Weight per pallet (net/gross)	652 kg / 672 kg

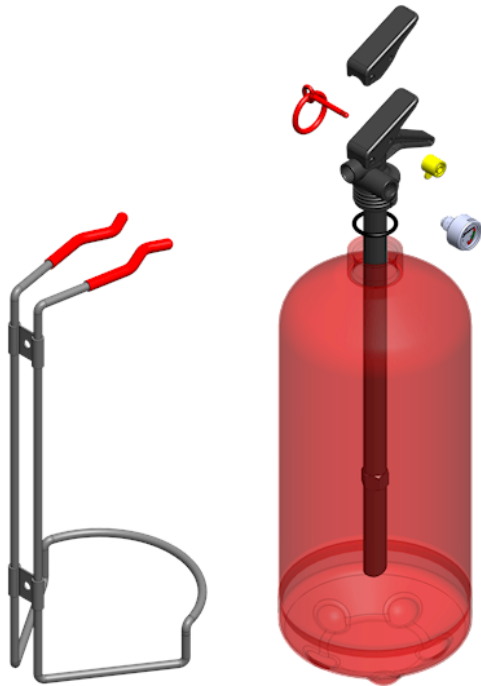

## Spare parts list

Description	Code
TRANSPORT BRACKET	00.241C.2960.00K0
PRESSURE GAUGE	00.652A.4900.10K0
O-RING 25.00 X 3.00	00.652A.5010.00K0
SAFETY PIN	00.652A.5020.00K0
SEAL	00.652A.5030.VEK0
BLACK LEVER	00.652A.6050.00K0
DIP TUBE	00.692C.5900.00K0
VALVE ASSEMBLY WITH LEVEL	00.692C.8505.21K0