

# FS9-JF

Stored pressure

Foam

9 L

Temperature ranges

0° + 60° C



BODY

ALUMINUM

Seamless, deep and drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin.

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts.

EXTINGUISHING AGENT

Water with additives (to improve class A) and AFFF. All parts in contact with the extinguishing agent are compatible.

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection.

HOSE/HORN

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle.

PACKAGING

Single piece cardboard box, robust and suitable for transport.



34



233



75

Configuration

● Standard

○ On request

BRACKET



● Button holed wall bracket



○ Button holed wall bracket PG-M E FG-M



○ TRANSPORT BRACKET PS9-EV



○ Metallic support Ø180

HOSE RINGS & PROTECTIVE BASE



● PROTECTIVE BASE 6/12KG Ø180 BLACK



● PORTASUPPORTO VALV.J C/DADO S/VITE


PACKAGING



○ BOX PS9 J/HJ

## Technical data

FIRE RATINGS	34A 233B 75F	
CHARGE	9 L 0 / -5%	
MATERIAL	Aluminum	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	Foam AFFF	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 46 s
PRESSURE	Operating pressure at 60 °C	13 bar
	Operating pressure at 20 °C	11 bar
	Operating pressure at 0 °C	9 bar
DIMENSIONS	Overall height	620 mm
	Bottle outer diameter	180 mm
WEIGHT	Empty / Charged	2.96 kg / 12.23 kg
PACKING SPECIFICATIONS	Standard packing	1 Pieces cardboard box
	Carton size (B x L x H)	195 x 195 x 650 mm
	Weight per carton	12.77 kg
	Pallet	48 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1440 mm
	Pallet volume	1.38 m3
	Weight per pallet (net/gross)	613 kg / 633 kg

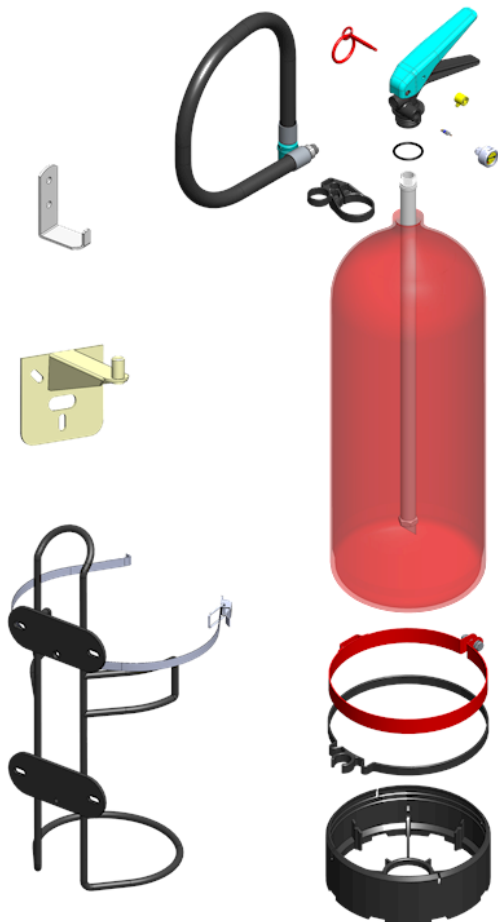

## Spare parts list

Description	Code
BUTTON HOLED WALL BRACKET	00.005E.2900.00K0
WALL BRACKET	00.005E.2950.00K0
BASE Ø180 BLACK	00.030E.7120.00K0
O-RING VALVE 29.74 x 2.95	00.033E.1100.01K0
SCHRADER VALVE	00.600A.5100.00K0
SEAL	00.652A.5030.VEK0
WALL BRACKET	00.752B.2900.10K0
HOSE HOLDER Ø180	00.800F.2800.00K0
PRESSURE GAUGE	00.814E.4950.20K0
TRANSPORT BRACKET	00.814F.2900.00K0
SUPPORT DE LANCE	00.850E.2955.20K0
PULSANTE VALV. J STAMP. AZZURRO	00.850E.5100.20
SAFETY PIN	00.850E.5300.00K0
METALLIC SUPPORT Ø180	00.850F.2970.00K0
Dip tube	00.850F.5900.00
VALVE ASSEMBLY WITHOUT PRESSURE GAUGE WITH LEVEL	00.860E.8505.00K0
ASSEMBLED HOSE	00.860F.2400.05K0
KIT DI RICARICA FS9-JF SCHIUMA	09.870F.9001.00