

CS5-AB

Stored pressure

Carbon Dioxide

5 kg

Temperature ranges

-30°+60°



On Request

BODY

STEEL

Seamless, hot-formed mild steel cylinder. Externally painted with polyester resin.

VALVE

Lever operated valve with nicked brass body. Front-outlet type, provided with burst disk safety relief valve.

EXTINGUISHING AGENT

Carbon dioxide (CO₂). All parts in contact with the extinguishing agent are compatible.

HOSE/HORN

SAE 100 R1 AT 3/8" WP 180 bar flexible rubber hose reinforced with steel plait, complete with horn made of polypropylene.

PACKAGING

Single piece cardboard box, robust and suitable for transport.




89

Configuration

● Standard

○ On request

BRACKET



● Button holed wall bracket



○ TRANSPORT BRACKET CS5-ML


PACKAGING



○ CARDBOARD BOX CS5-AB/AM

Technical data

FIRE RATINGS	89B	
CHARGE	5 kg 0 / -5%	
MATERIAL	STEEL	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	CO2	
PROPELLANT	CO2	
DISCHARGE	Discharge time	~ 13 s
DIMENSIONS	Overall height	743 mm
	Bottle outer diameter	136 mm
WEIGHT	Empty / Charged	8.84 kg / 13.84 kg
PACKING SPECIFICATIONS	Standard packing	1 Pieces cardboard box
	Carton size (B x L x H)	235 x 160 x 790 mm
	Weight per carton	14.6 kg
	Pallet	40 Cartons
	Pallet size (B x L x H)	1200 x 800 x 1420 mm
	Pallet volume	1.36 m3
	Weight per pallet (net/gross)	584 kg / 604 kg

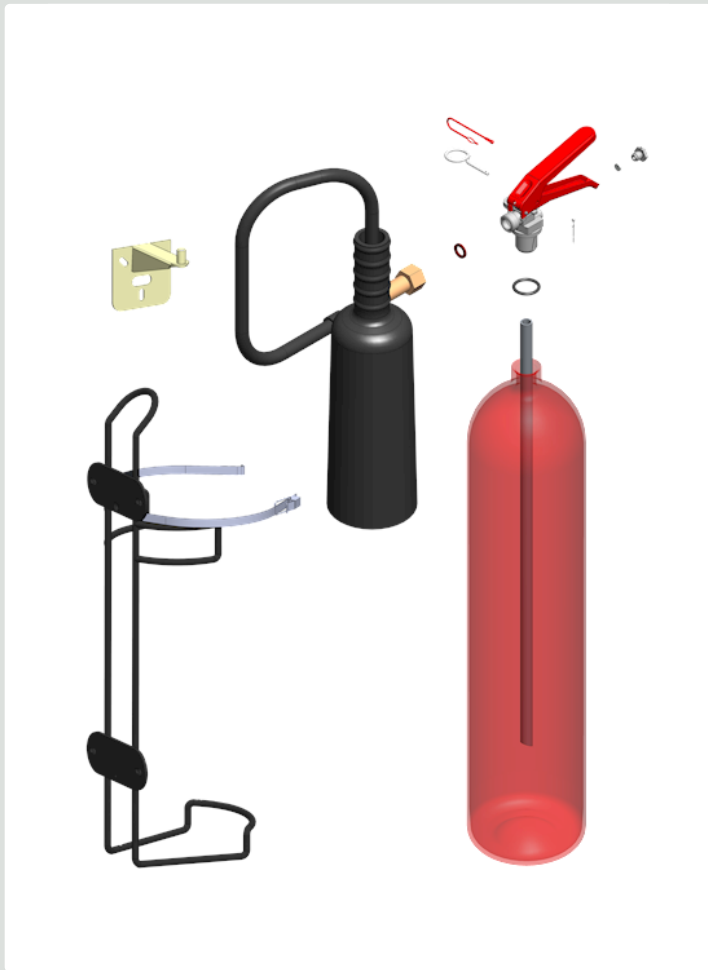

Spare parts list

Description	Code
SAFETY WIRE	00.005A.3220.00K0
BUTTON HOLED WALL BRACKET	00.005E.2900.00K0
O-RING	00.009E.0010.01K0
O-RING VALVE	00.705M.5060.00K0
SAFETY PIN	00.754B.5020.00K0
SAFETY VALVE PLUG	00.754B.5050.00K0
BURST DISK	00.754B.5060.00K0
SAFETY LATCH	00.754B.6290.00K0
VALVE ASSEMBLY	00.754B.6950.00K0
ASSEMBLED HOSE	00.754M.2400.00K0
DIP TUBE	00.754M.5900.00K0
TRANSPORT BRACKET	00.765M.2900.00K0

ANAF Fire Protection

Via del Commercio, 4 - Torre d'Isola (Pavia) - Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu