

FS2-Y

Stored pressure

Foam

2 L

ANAFGROUP

Temperature ranges

0°C + 60°C



On Request

BODY

ALUMINUM

Seamless, deep and drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin.

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The valve is equipped with a sintered filter to protect sensitive parts.

EXTINGUISHING AGENT

Water with additives (to improve class A) and AFFF. All parts in contact with the extinguishing agent are compatible

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection.

PACKAGING

4 pieces cardboard box, robust and suitable for transport.



Configuration

● Standard

○ On request

PACKAGING



○ One-piece pre-formed box 1 PZ. PS2-Y



○ One-piece white cardboard box

BRACKET



○ CORPO SUPPORTO PS2-Y




● FASCETTA SUPPORTO PS2-Y



○ SUPPORTO PS2-Y VERNICIATO

Technical data

FIRE RATINGS	8A 70B 25F	
CHARGE	2 L 0 /-5	
MATERIAL	Aluminum	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	SCHAUM F AFFF	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 18 s
PRESSURE	Operating pressure at 60 °C	13 bar
	Operating pressure at 20 °C	11 bar
	Operating pressure at 0 °C	9 bar
DIMENSIONS	Overall height	378 mm
	Bottle outer diameter	108 mm
WEIGHT	Empty / Charged	0.65 kg / 2.65 kg
PACKING SPECIFICATIONS	Standard packing	4 Pieces cardboard box
	Carton size (B x L x H)	240 x 245 x 405 mm
	Weight per carton	11 kg
	Pallet	60 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1764 mm
	Pallet volume	1.68 m3
	Weight per pallet (net/gross)	660 kg / 680 kg

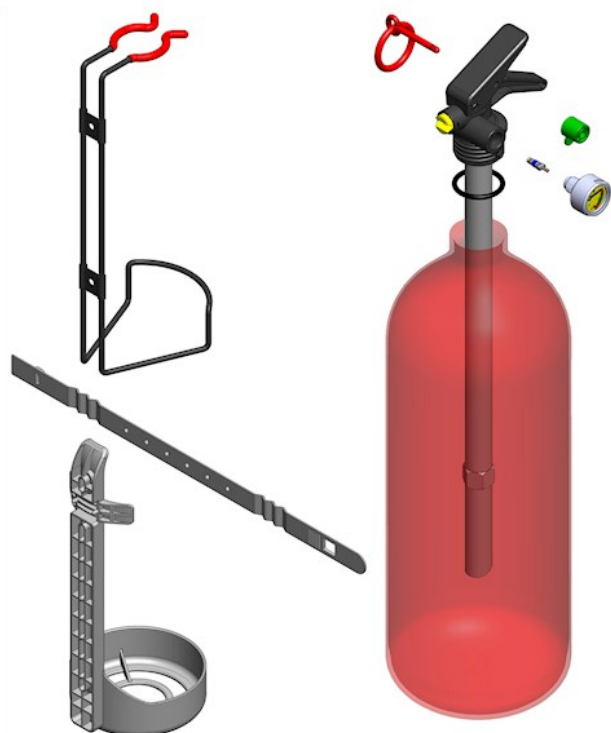

Spare parts list

Description	Code
VALVE ASSEMBLY WITHOUT PRESSURE GAUGE WITH LEVEL	00.452B.8505.01K0
SCHRADER VALVE	00.600A.5100.00K0
O-RING 25.00 X 3.00	00.652A.5010.00K0
SAFETY PIN	00.652A.5020.00K0
SEAL	00.652A.5030.VEK0
BLACK LEVER	00.652A.6050.00K0
BRACKET	00.682B.2500.00K0
BRACKET STRIP	00.682B.2510.00K0
TRANSPORT BRACKET	00.800B.2961.00K0
DIP TUBE	00.800B.5900.00K0
PRESSURE GAUGE	00.814E.4950.20K0